



ma_mcpecip67_01_010001_en_190102

GFE-MCPE-C-IP67

Conventional Manual Call Point - Outdoor



MADE IN PORTUGAL - EU

GLOBAL FIRE EQUIPMENT S.A.


Sítio dos Barrabés, Armazém Nave Y, Caixa Postal 908-Z, 8150-016 São Brás de Alportel - PORTUGAL

Tel: +351 289 896 560 • Sales: sales@globalfire.pt • Technical Support: techs@globalfire.pt • www.globalfire.pt

TECHNICAL SPECIFICATIONS

OPERATING VOLTAGE	20 V to 30 V DC	
CURRENT CONSUMPTION - QUIESCENT	200 uA	
ALARM	50 mA @ 24V DC nominal - Alarm Resistance 470 Ohms max.	
OPERATING TEMPERATURE	-10°C to +55°C	
STORAGE TEMPERATURE	-30°C to +60°C	
INGRESS PROTECTION GRADE	IP67 - Type A - Outdoor Use	
MAXIMUM HUMIDITY	95% RH Non-Condensing @ 40°C	
COLOUR / CASE MATERIAL	Red / ABS & Clear/ PC - Flame Retardant - Rating 94V0	
WEIGHT	262 g includes back box and fixings	
DIMENSIONS - SURFACE MOUNTED	111.9 (W) x 111.9 (H) x 81.3 mm	
ORDER CODE	CERTIFICATE	DESCRIPTION
GFE-MCPE-C-IP67	1328-CPR-0373	CONVENTIONAL MANUAL CALL POINT, IP67 - OUTDOOR USE


MECHANICAL SPECIFICATION

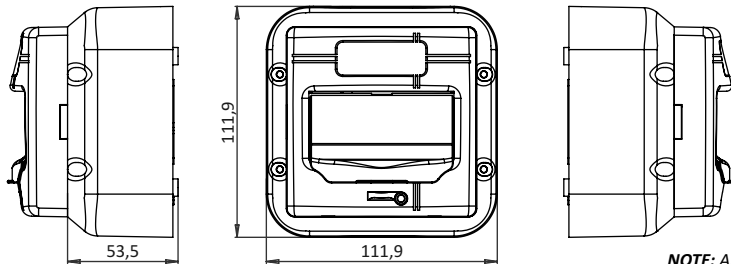

NOTE: All dimensions in mm

CONNECTIONS

Please note that this device is polarised,
please ensure that both zone connections, are kept on the same terminal in all the modules.
The positive side of the zone should be connected to the RED wire and negative to the BLACK wire.

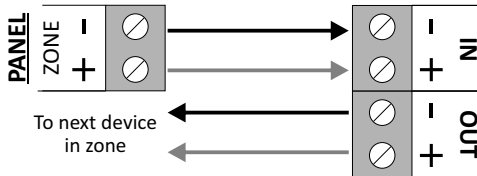

NOTE: Only last device in zone should have e.o.l. (end of line) fitted across OUT zone terminals.