ma_valkyriecbip65_01_010002_en_190215

# Valkyrie CB IP65

## Conventional Wall Beacon Outdoor Use-IP65

MADE IN PORTUGAL - EU

**GLOBAL FIRE EQUIPMENT S.A.**
Sítio dos Barrabés, Armazém Nave Y, Caixa Postal 908-Z, 8150-016 São Brás de Alportel - PORTUGAL
Tel: **+351 289 896 560** • Sales: **sales@globalfire.pt** • Technical Support: **techs@globalfire.pt** • www.**globalfire.pt**

| TECHNICAL SPECIFICATIONS | |
|---|---|
| SUPPLY VOLTAGE | 20 V to 30 V DC |
| CURRENT - SOUNDER/BEACON ACTIVE | 10 mA, 280 mW @ 28 V |
| CABLE SIZE | 0.5-2.5 mm² |
| RESET/STAR-UP TIMES | 20 seconds max. |
| PROTECTION CATEGORY | Type B - Outdoor Use - Rating IP65 |
| COLOUR / CASE MATERIAL | Red / ABS |
| OPER. TEMPERATURE | -25°C to 70°C |
| MAX. HUMIDITY | 95% RH Non-Condensing |
| DIMENSIONS | 112 (D) x 82 (H) mm |
| WEIGHT | 205 g - 240 g including packaging |
| **ORDER CODE** | **DESCRIPTION** |
| **VALKYRIE CB IP65** | CONVENTIONAL WALL MOUNTED BEACON - IP65 RATED |

## MECHANICAL SPECIFICATION




## BEACON TERMINAL CONNECTIONS

***Please note that this device is polarised.***

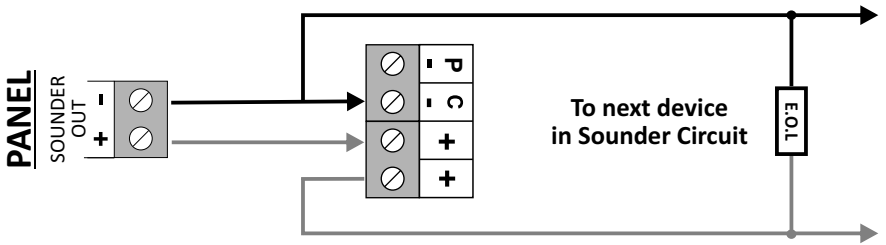


**Terminals**

**C-** Negative Supply Continuous

**+** Positive Supply - IN

**NOTE**

Only last device in Sounder Circuit should have e.o.l. (end of line) fitted across + and - terminals.